


Watermaster® On Board



Vertically mounted, to fit into tight spaces!

Smooth, constant flow from specifically designed diaphragms

Quick Connect 12mm ports for faster installation

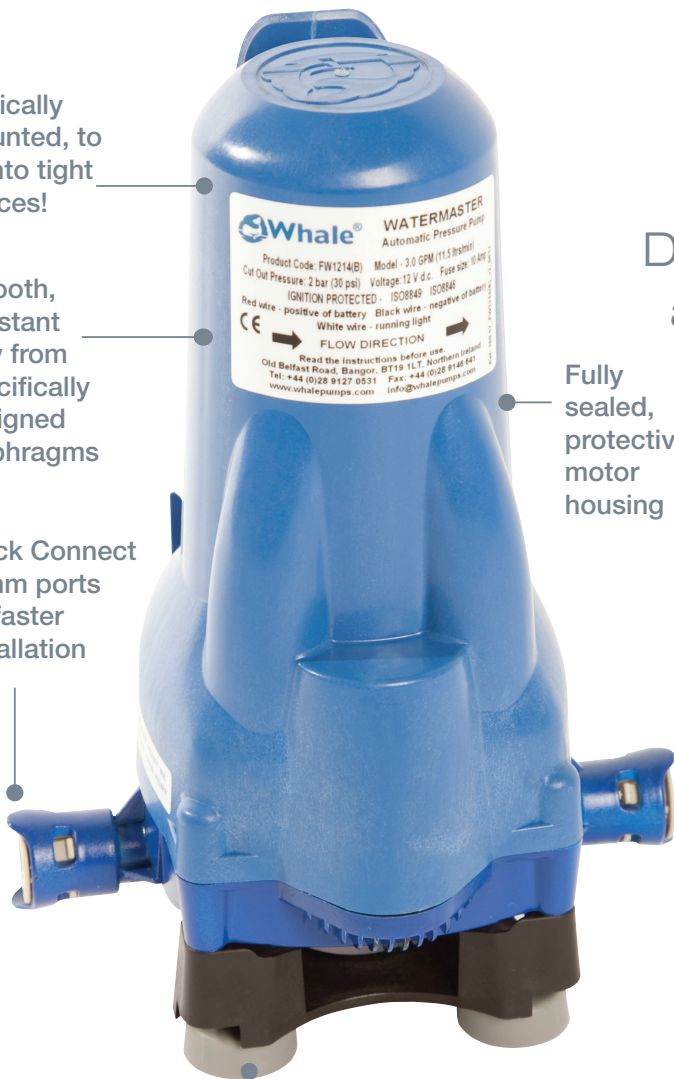

Fully sealed, protective motor housing

Rubber feet to absorb vibrations

NEW On Board Water Pump

Delivers smooth consistent flow and runs dry without damage



Lightweight

20% lighter*
plus
8L of water per minute!



Product Code	FP0814 (B)
Model	Watermaster On Board P2V
Voltage (V d.c.)	12
Open Flow Rate (per min)	8 ltrs (2.0 GPM)
Cut Out Pressure	2 bar (30psi)
Recommended Fuse Size	5 Amp Automotive
Current Draw	4 amps
Weight	1.48kg (3.26 lbs)
Inlet/Outlet Size	Whale® Quick Connect 12mm Female Connections
Hose Connections	For 1/2" flexible hose use WU1282. For 3/8" flexible hose use WU1280
Semi Rigid Pipework System Connections	For Whale® Quick Connect 12mm no adapter required - use 12mm semi rigid pipework WX7112
Materials in contact with fluid	Glass-filled Polypropylene, Monoprene®, Nitrile®, Stainless Steel
Service Kits	AK1317 - Microswitch Kit, AK1318 - Replacement Head Kit. AK1320 - Strainer
Max. Wire Size	1.5mm ² (16AWG)
Max. Wire Size	3m (9ft)
Max. Discharge Head	20m (66ft)

*Compared to a Whale® Smartflo based on tests carried out in the Whale® Laboratory, information is correct on Sept 2012.